

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

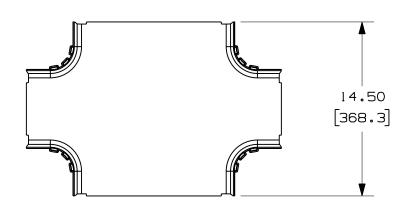



PANDUIT PART NUMBER	WE I GHT			
FRFWC12X4W6	2.05 LB/EACH (929 ₉ /EACH)			

NOTES:

- SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES
 TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
 THE FIBERRUNNER 12×4 FOUR-WAY CROSS WITH 6" EXITS
 IS DESIGNED WITH A MINIMUM 2" (50.8) BEND RADIUS TO PROTECT FIBER OPTIC CABLES.
- 3. DIMENSIONS IN PARENTHESES ARE IN METRIC.







ENG. REF.: D37617CA_DC_FRFWC12X4W6_01.prt

							ENG. THE ST DS/OT/ONEDOLITH HOTEX THOUGHT OF							
									CAD FILENAME/LAYERS A FRFWC12X4W6.pdf					
											PANDUIT CORP TINLEY PARK, ILLINOIS			
										FIBERRUNNER 12×4 FOUR-WAY CROSS				
] WITE	WITH 6" EXITS (FRFWC12X4W6) CUSTOMER DRAWING			
										UNLESS DIMENS	OTHERWISE SPECIFIED, IONAL TOLERANCES ARE:	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN		
-				D. REVISED GENERAL NOTES C. ADDED RIGHT SIDE VIEW						(.X) ± (.XX) ±.	(.XXX) ± 03 (.8) ANGLES ±	INCHES, THIRD ANGLE PROJECTION.		
1	6-28-06	DTP	RZ	B. REVISED PART WEIGHT A. REVISED CAD FILENAME	37617-75	RN	RN			JHNU	MAT'L:	scale NONE		
R	1-3-01	JHNU	CEO	RELEASED TO PRODUCTION	37617-75	HIW	HIW			1 - 3 - 0 1	ABS	DRAWING NO. DWG		
REV	DATE	BY	CHK	DESCRIPTION	ECN -	R	CUST	SUP	GMBH	CHK'D H I W		37617-75 A		