



MODEL: SP-1511S-1
PRODUCT: Dynamic Speaker
EDITION: A/2016

Soberton Inc.

THIS SPECIFICATION COVERS OUR PRODUCT OF DYNAMIC SPEAKER UNIT FOR MOBILE TELEPHONE USE

SPEAKER ELECTROACOUSTIC CHARACTERISTICS


sound pressure level	83±3dB Spl @ 2KHz 1.0V(Sine wave) 0.1m measured with baffle shown in Fig.1. (1CC BOX)
resonance frequency (FO)	850±20%Hz @ 1Vrms. (In 1CC BOX)
measuring diagram	Shown in Fig.1
typical frequency response curve	Shown in Fig.2.
rated noise power	0.7W (In 1CC Box)
short-term max.power	0.8W (In 1CC Box)
distortion	Less than 5% at 1KHz 1V
operation test	Must be free audible noise (buzzes and rattles) (400 ~ 5000Hz frequency range ,input level up to 2.0Vrms (In 1CC BOX))

GENERAL SPECIFICATIONS

operating temperature range	-25°C ~ +65°C
storage temperature range	-40°C ~ +75°C
ac impedance	8.0Ω±15% (@2KHz 1Vrms)
dimension	15 x 11 x 3.3 mm

TYPICAL FREQUENCY RESPONSE CURVE

FREQUENCY MEASURING CIRCUIT (SPEAKER MODE) (Fig.1)

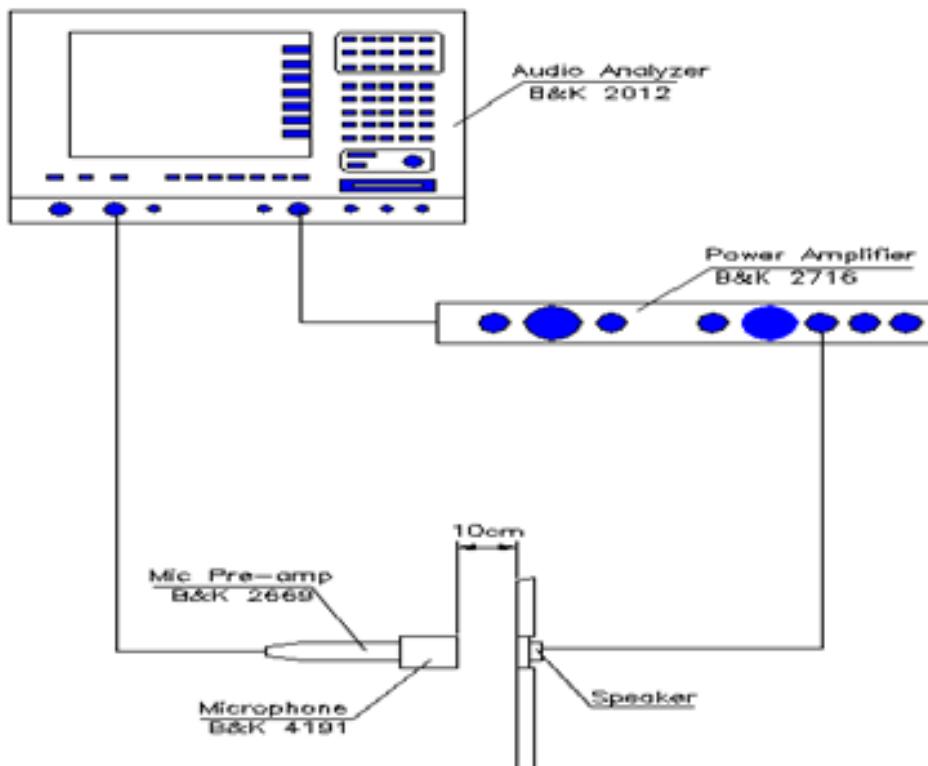




MODEL: SP-1511S-1
PRODUCT: Dynamic Speaker
EDITION: A/2016

Soberton Inc.

TYPICAL FREQUENCY RESPONSE CURVE (Continued)

TYPICAL FREQUENCY RESPONSE CURVE (SPEAKER MODE) (Fig.2)

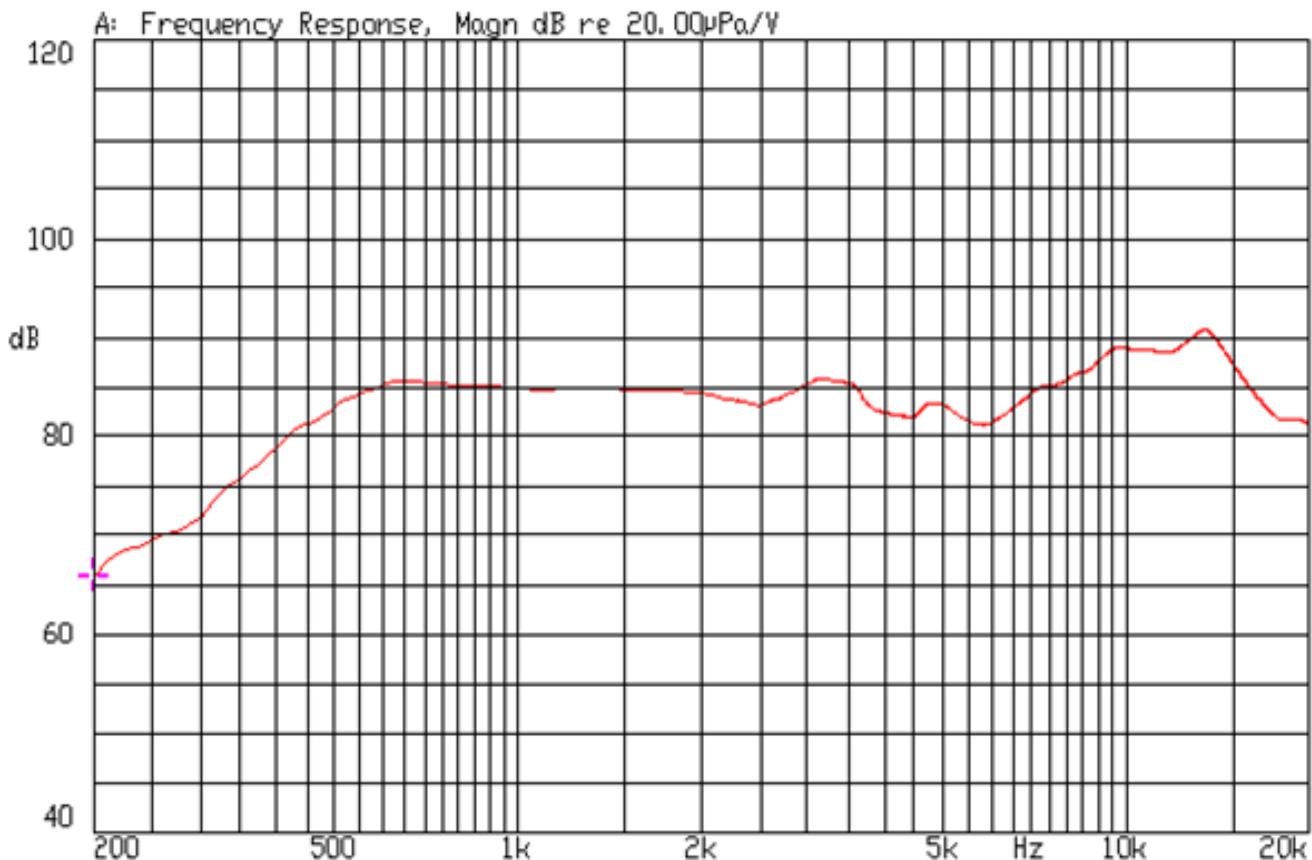

TEST CLIMATIC CONDITIONS

STANDARD TEST CONDITIONS

temperature	17~25°C
relative humidity	45%~80%(RH)
air pressure	860~1060 hPa

JUDGEMENT CONDITIONS

temperature	20±2°C
relative humidity	60%~70%(RH)
air pressure	860~1060 hPa



MODEL: SP-1511S-1
PRODUCT: Dynamic Speaker
EDITION: A/2016

Soberton Inc.

RELIABILITY TESTS

The sound pressure as specified shall neither deviate more than ± 3 dB from the initial value, nor any significant damage after any of following testing.

HIGH TEMPERATURE TEST

high temperature	+80 ± 2 °C
duration	48 hours

LOW TEMPERATURE TEST

low temperature	-30 ± 2 °C
duration	48 hours

HEAT SHOCK TEST (See in Fig.3)

high temperature	+80 ± 2 °C
low temperature	-30 ± 2 °C
changeover time	< 5 min
duration	1 hour
cycle	10

HUMIDITY TEST

temperature	+40 ± 2 °C
relative humidity	90~95%
duration	48 hours

TEMPERATURE CYCLE TEST

temperature	-40°C	+75°C
duration	45 minutes	45 minutes
temperature gradient	1~3°C /min	
cycle	10	

DROP TEST

mounted with dummy set	
mass	100 g
height	1.5 m
cycle	6 (1 each plain) onto the concrete board

LOAD TEST

noise signal	White noise (EIA filter)
input power	0.5W (1CC BOX) (2.0Vrms)
duration	96 hours




MODEL: SP-1511S-1
PRODUCT: Dynamic Speaker
EDITION: A/2016


Soberton Inc.

TEST METHOD


HEAT SHOCK TEST (Fig. 3)

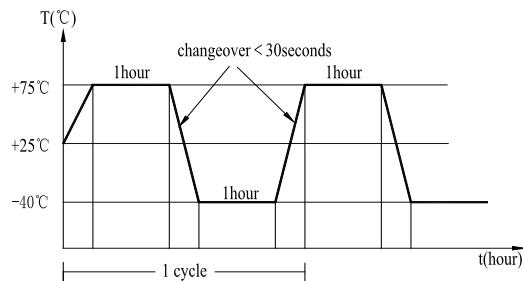

TEMP. CYCLE TEST (Fig. 4)

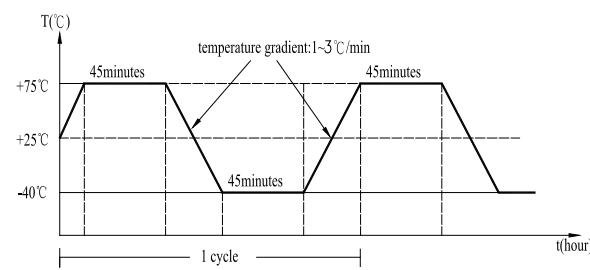

PRODUCT EXTERNAL VIEW AND DIMENSIONS (Fig. 5)

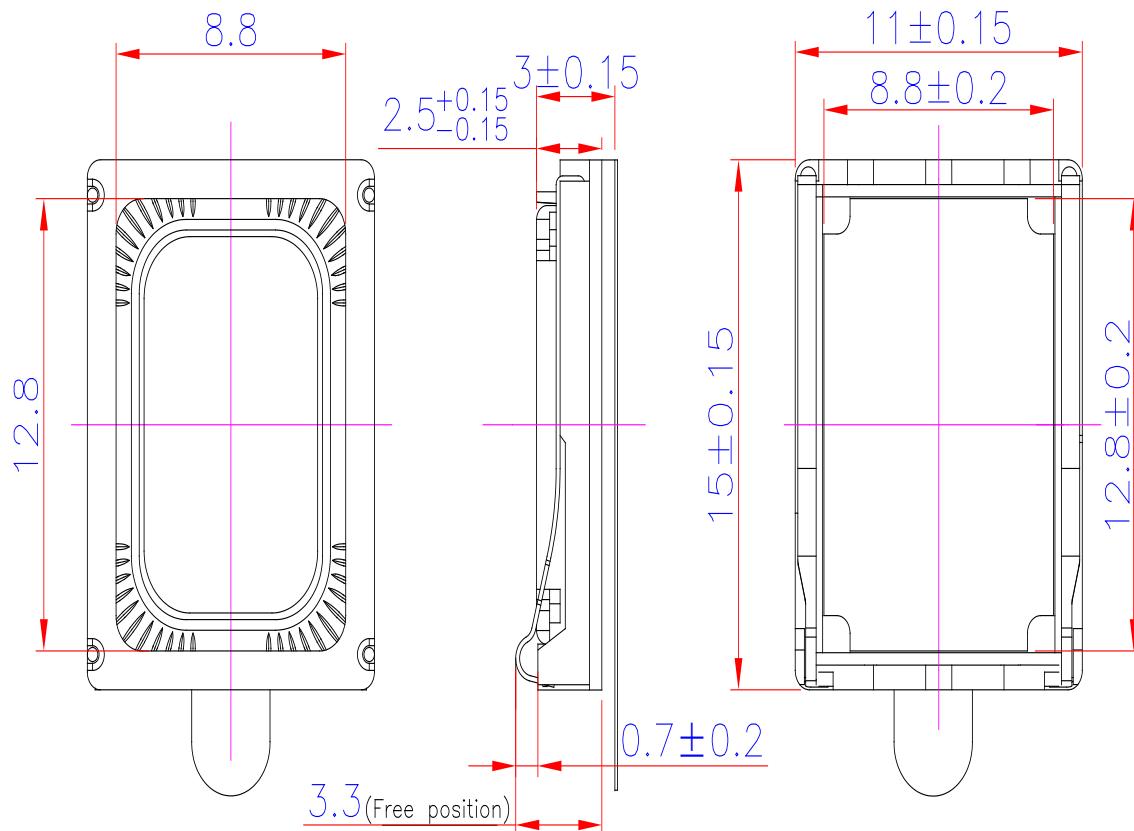

no	item	material	quantity
1	Frame	PPA	1
2	Magnet	N42	1
3	Pole piece	SPCC	1
4	U yoke	SPCE	1
5	Diaphragm	PEEK	1
6	Voice coil	COPPER WIRE	1
7	Front cap	PPA	1
8	Spring terminal	SUS	2
9	Pad	PE	0.5T



MODEL: SP-1511S-1
PRODUCT: Dynamic Speaker
EDITION: A/2016

Soberton Inc.

PACKING

