


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0402 NPO 6.2pF 50V (0402N6R2C500CT)

1. Dimension

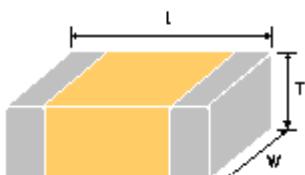

Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402(1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @25°C

(Cap, DF @1MHz, 1Vrms ; IR @50V, 120sec)

Item	Spec
Cap [pF]	6.2 (± 0.25 pF)
DF	$\leq 0.191\%$
IR [G-ohm]	>10

3. Impedance/ESR-Frequency

(Equipment: 4287A)

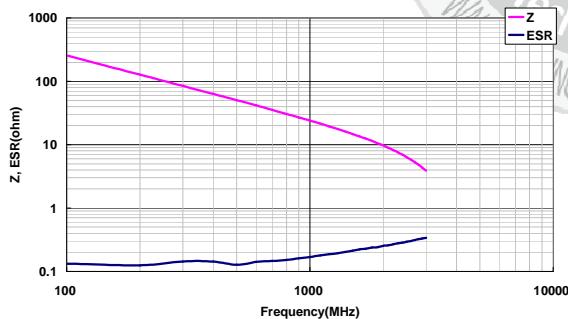

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)


≤10 pF , The TCC measurement is unstable and high deviation

5. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

24V : 0.00% ; 50V : 0.00%

$\Delta C/C(\%)$

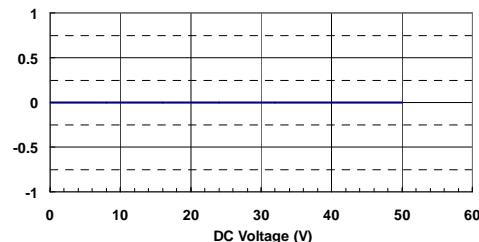

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

$\Delta C/C(\%)$

