




UNIT:mm

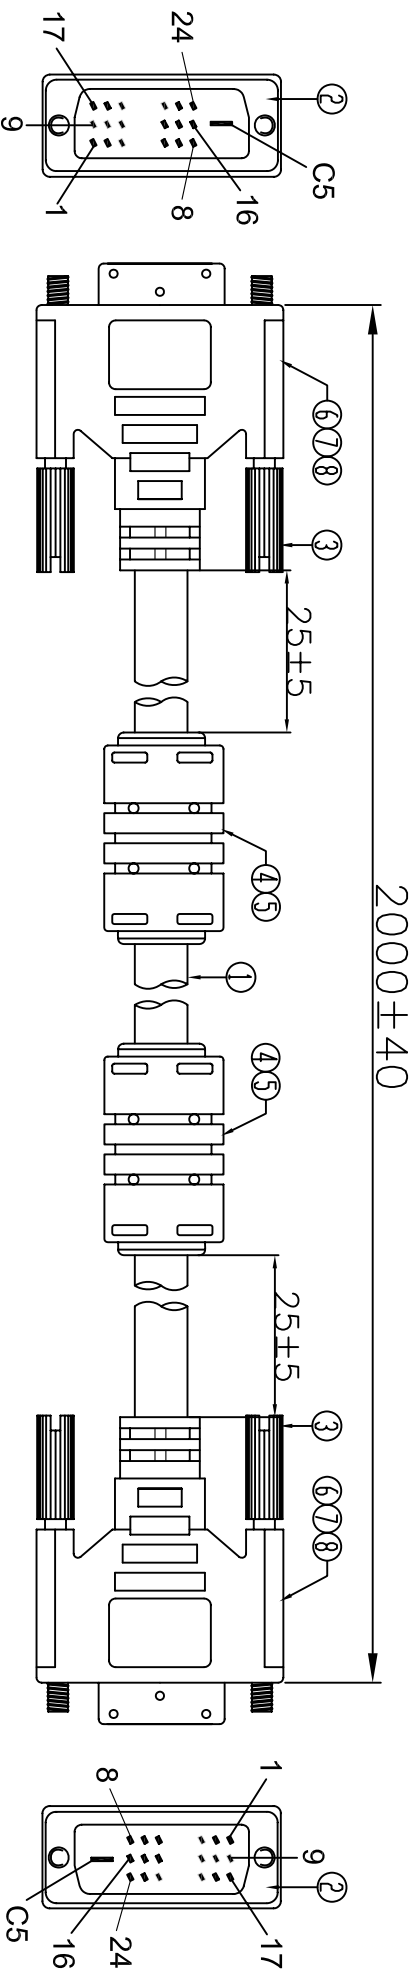

Electronic Test:  
 1. 100% Test,(Open,Short,Miss Wire)  
 2. Contact Resistance:2 ohm max.  
 3. Insulation Resistance:10M ohm min.  
 4. Hi-Pot:300V DC/10ms  
 5. BENDING TEST:ANGLE 90°,BENDING 2~3 TIMES UP AND DOWN.

⑧	TUBE	8	HEAT SHRINK TUBE BLACK OD2.0mm L=8mm
		8	HEAT SHRINK TUBE BLACK OD1.0mm L=15mm
⑦	Copper	2	HEAT SHRINK TUBE BLACK OD0.8mm L=25mm
⑥	IN JACKET	8g	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W30mm*L75mm
		30g	CLEAR PE(NM-15)
⑤	OUT JACKET	20g	WHITE(EC-005/W-18#) PVC 50P(WM-17)
④	FERRITE	2	BLACK PVC 45P (CH-002)
③	SCREW	4	Core:RH17.5*10.6*28.5mm
②	CONN	2	NICKEL MOLD WHITE(EC-005/W-18#) ABS
①	CABLE	1	SCREW #4*40UNS Ø2.8*L32mm

SPECIFICATION		VERSIONS/EDITION	
NO.	NAME	A/0	PROJECTION
4			
3			
2			
1			

**CNC Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN BY ZHONGHS DAWING ND.

CHECKED BY CUSTOMER

APPROVAL BY ITEM NO. 750-10010-00200

DECIDE BY DATE 2012-02-07

VERSIONS/EDITION A/0 PROJECTION

