

LOC	DIST	REVISIONS					
-	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			1	NEW DRAWING	19JUN2013	RS	EC

SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN DESIGNED TO THE FOLLOWING STANDARDS, BUT HAS NOT YET BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCIES. ALL TEST REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS WILL BE MET:

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 1000 A, 520 VAC
 LINE FREQUENCY: 50-60 Hz
 NOMINAL LEAKAGE CURRENT: 6 mA
 MAXIMUM LEAKAGE CURRENT: 222 mA @ 277 V, 50 Hz
 OPERATING AMBIENT TEMPERATURE RANGE @ RATED CURRENT, I : -10°C TO +50°C

AT AMBIENT TEMPERATURE, T , ABOVE MAX RATED I , THE MAXIMUM OPERATING CURRENT, I_o , IS DETERMINED BY THIS EQUATION:

$$I_o = I_R \sqrt{\frac{100 - T_o}{50}}$$

RELIABILITY SPECIFICATIONS

STORAGE TEMPERATURE: -40°C TO +85°C
 HUMIDITY: 21 DAYS @ 40°C AND 95% RH

TEST SPECIFICATIONS




INDUCTANCE: 36.8 µH NOMINAL
 CAPACITANCE @ 1 kHz, 0.25 VAC MAX., 25°C ±1°C:
 LINE TO GROUND: 2.62 µF
 LINE TO LINE: 12.3 µF
 DISCHARGE RESISTOR
 L-G AND L-L: 666kΩ / 666kΩ
 IR, L/L @ 20°C, 50% RH: 6000MΩ (MIN.) @100VDC

RECOMMENDED RECEIVING INSPECTION HIPOT

LINE TO GROUND: 2200 VDC FOR 1 MINUTE
 LINE TO LINE: 2160 VDC FOR 1 MINUTE

FILTER APPROVAL:


THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

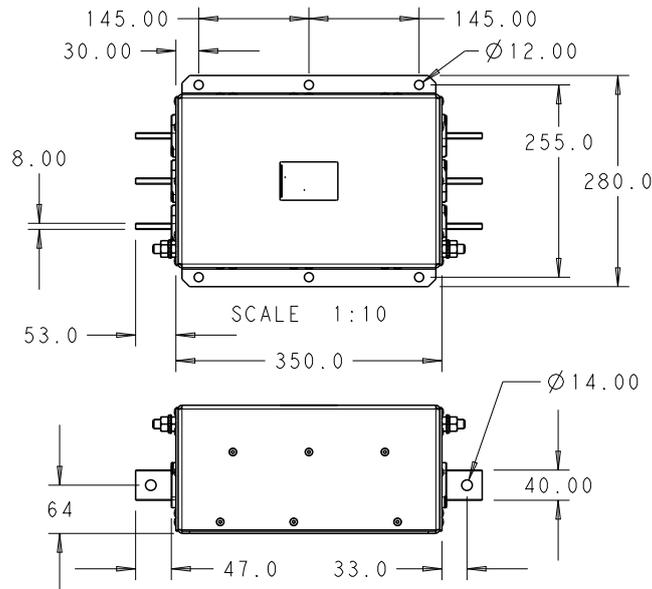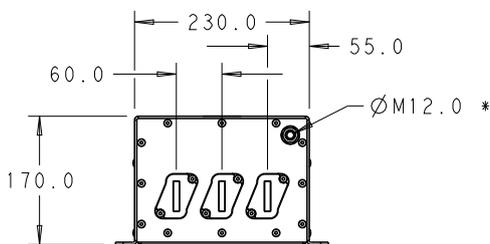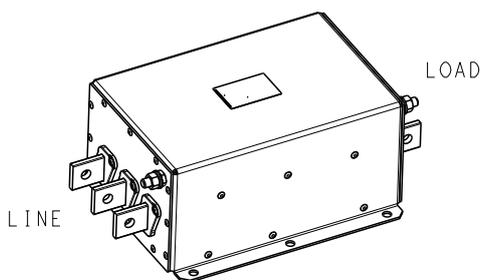

* DO NOT LOOSEN INNER GROUND NUTS. TORQUE OUTER GROUND NUTS TO: 25-30 NM [220-260 IN-LB]

TYPICAL INSERTION LOSS
 COMMON MODE 50/50 Ω; DIFFERENTIAL MODE 100/100 Ω

MHz	0.01	0.05	0.15	0.5	1.0	3.0	5.0	10	30
CM	12	13	56	71	67	49	45	37	18
DM	32	46	60	62	58	46	41	35	27

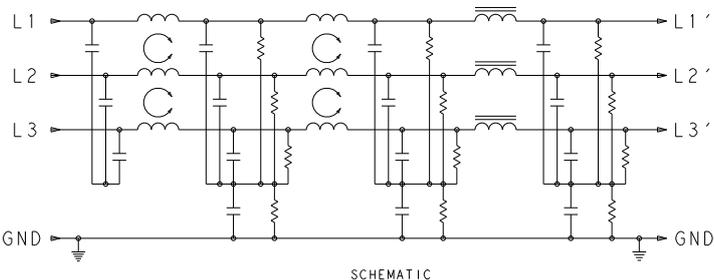

20
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.
THIS DRAWING IS UNPUBLISHED.
BY -
COPYRIGHT 20

DIMENSIONS: mm	DWN RS 19JUN2013	MATERIAL	FINISH
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK EC 19JUN2013	TE Connectivity	
0 PLC ±2.0 1 PLC ±0.1 2 PLC ±0.01 3 PLC ±0.005 4 PLC ±0.0001 ANGLES ±-	APVD EC 19JUN2013		
	PRODUCT SPEC	NAME	
	APPLICATION SPEC	1000ACPV12 3-PHASE DELTA FILTER	
	WEIGHT	SIZE	RESTRICTED TO
	-	A 400779	-
	Customer Drawing	CAGE CODE	DRAWING NO
		8-1609148-5-25	SCALE 1:1
			SHEET 1 OF 1
			REV 1