

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

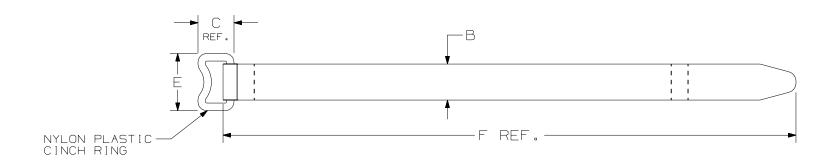



PANDUIT PART NO.	:	E DIA.	/ \	B in (mm)	C in (mm)	in (mm)	in (mm)	F in (mm)	G in (mm)	MIN. LOOP TENSILE 16s.	CROSS SECTION	APPROXIMATE WEIGHT lbs/100 PIECES (g)
HLC3S	2.0 (50.8)	3.0 (76.2)	.100 (2.5)	.750 (19.1)	.750 (19.1)			12.0 (305)	.100 (2.5)	50 (222)	STANDARD	.74 (337)
HLC5S	3.0 (76.2)	5.0 (127)	.100 (2.5)	.750 (19.1)	.750 (19.1)			18.0 (457)	.100 (2.5)	50 (222)	STANDARD	.93 (423)

NOTES:

- I) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND COLOR. 2) MINIMUM 2" OVERLAP REQUIRED TO ACHIEVE LOOP TENSILE RATING.
- DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS. SS_26935.PRT

										/ \ \ \ \ \ \ \ \ \ \ \ \ \ CORP. TINLEY PARK, ILLINOIS		
									TAK	-TY HOOK & LOOP		
										THERWISE SPECIFIED, NAL TOLERANCES ARE:	UNLESS OTHERWISE SPECIFIED,	
									(.X) ±	(.XXX) ± .030 ,125 ANGLES ±	ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
									DRAWN BY KET	MAT'L:	scale NONE	
6	3/31/06	ERW		ADDED "APPROXIMATE WEIGHT PER 100PCS" COLUMN.	26935	6			DATE 11/23/94	WOVEN NYLON HOOK/LOOP	DRAWING NO.	DWG
REV	DATE	BY	СНК	DESCRIPTION	ECN -	R	CUST	SUP	HVP COLOR: BLACK		SS-26935	