

## SIPMOS® Power Transistor



**SPD 07N20**

### Features

- N channel
- Enhancement mode
- Avalanche rated
- dv/dt rated
- Pb-free lead plating; RoHS compliant

### Product Summary

Drain source voltage	$V_{DS}$	200	V
Drain-Source on-state resistance	$R_{DS(on)}$	0.4	$\Omega$
Continuous drain current	$I_D$	7	A

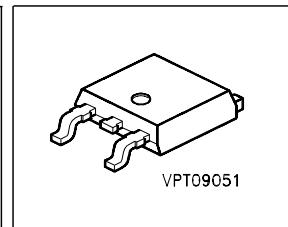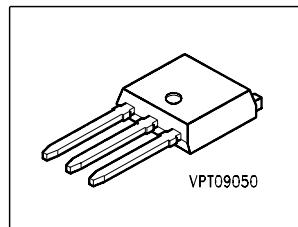

Type	Package	Pb-free	Packaging	Pin 1	Pin 2	Pin 3
SPD07N20	PG-T0252	Yes	Tape and Reel	G	D	S
SPU07N20	PG-T0251	Yes	Tube			

**Maximum Ratings**, at  $T_j = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current $T_C = 25^\circ\text{C}$ $T_C = 100^\circ\text{C}$	$I_D$	7 4.5	A
Pulsed drain current $T_C = 25^\circ\text{C}$	$I_{D\text{pulse}}$	28	
Avalanche energy, single pulse $I_D = 7 \text{ A}$ , $V_{DD} = 50 \text{ V}$ , $R_{GS} = 25 \Omega$	$E_{AS}$	120	mJ
Avalanche energy, periodic limited by $T_{j\text{max}}$	$E_{AR}$	4	
Reverse diode dv/dt $I_S = 7 \text{ A}$ , $V_{DS} = 160 \text{ V}$ , $di/dt = 200 \text{ A}/\mu\text{s}$ , $T_{j\text{max}} = 175^\circ\text{C}$	dv/dt	6	kV/ $\mu\text{s}$
Gate source voltage	$V_{GS}$	$\pm 20$	V
Power dissipation $T_C = 25^\circ\text{C}$	$P_{\text{tot}}$	40	W
Operating and storage temperature	$T_j$ , $T_{\text{stg}}$	-55... +175	°C
IEC climatic category; DIN IEC 68-1		55/150/56	

### Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Characteristics</b>					
Thermal resistance, junction - case	$R_{thJC}$	-		3.1	K/W
Thermal resistance, junction - ambient, leded	$R_{thJA}$	-	-	100	
SMD version, device on PCB: @ min. footprint @ 6 cm <sup>2</sup> cooling area <sup>1)</sup>	$R_{thJA}$			75	
		-	-	50	

### Electrical Characteristics, at $T_j = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Static Characteristics</b>					
Drain- source breakdown voltage $V_{GS} = 0 \text{ V}$ , $I_D = 0.25 \text{ mA}$	$V_{(BR)DSS}$	200	-	-	V
Gate threshold voltage, $V_{GS} = V_{DS}$ $I_D = 1 \text{ mA}$	$V_{GS(\text{th})}$	2.1	3	4	
Zero gate voltage drain current $V_{DS} = 200 \text{ V}$ , $V_{GS} = 0 \text{ V}$ , $T_j = 25^\circ\text{C}$ $V_{DS} = 200 \text{ V}$ , $V_{GS} = 0 \text{ V}$ , $T_j = 125^\circ\text{C}$	$I_{DSS}$	-	0.1	1	$\mu\text{A}$
Gate-source leakage current $V_{GS} = 20 \text{ V}$ , $V_{DS} = 0 \text{ V}$	$I_{GSS}$	-	10	100	nA
Drain-Source on-state resistance $V_{GS} = 10 \text{ V}$ , $I_D = 4.5 \text{ A}$	$R_{DS(\text{on})}$	-	0.3	0.4	$\Omega$

<sup>1</sup> Device on 40mm\*40mm\*1.5mm epoxy PCB FR4 with 6 cm<sup>2</sup> (one layer, 70 $\mu\text{m}$  thick) copper area for drain connection. PCB is vertical without blown air.

**Electrical Characteristics**, at  $T_j = 25^\circ\text{C}$ , unless otherwise specified

<b>Parameter</b>	<b>Symbol</b>	<b>Values</b>			<b>Unit</b>
		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Dynamic Characteristics</b>					
Transconductance $V_{DS} \geq 2^* I_D * R_{DS(on)max}$ , $I_D = 4.5 \text{ A}$	$g_{fs}$	3	4.2	-	S
Input capacitance $V_{GS} = 0 \text{ V}$ , $V_{DS} = 25 \text{ V}$ , $f = 1 \text{ MHz}$	$C_{iss}$	-	400	530	pF
Output capacitance $V_{GS} = 0 \text{ V}$ , $V_{DS} = 25 \text{ V}$ , $f = 1 \text{ MHz}$	$C_{oss}$	-	85	130	
Reverse transfer capacitance $V_{GS} = 0 \text{ V}$ , $V_{DS} = 25 \text{ V}$ , $f = 1 \text{ MHz}$	$C_{rss}$	-	45	70	
Turn-on delay time $V_{DD} = 30 \text{ V}$ , $V_{GS} = 10 \text{ V}$ , $I_D = 3 \text{ A}$ , $R_G = 50 \Omega$	$t_{d(on)}$	-	10	15	ns
Rise time $V_{DD} = 30 \text{ V}$ , $V_{GS} = 10 \text{ V}$ , $I_D = 3 \text{ A}$ , $R_G = 50 \Omega$	$t_r$	-	40	60	
Turn-off delay time $V_{DD} = 30 \text{ V}$ , $V_{GS} = 10 \text{ V}$ , $I_D = 3 \text{ A}$ , $R_G = 50 \Omega$	$t_{d(off)}$	-	55	75	
Fall time $V_{DD} = 30 \text{ V}$ , $V_{GS} = 10 \text{ V}$ , $I_D = 3 \text{ A}$ , $R_G = 50 \Omega$	$t_f$	-	30	40	

**Electrical Characteristics**, at  $T_j = 25^\circ\text{C}$ , unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Dynamic Characteristics</b>					
Gate to source charge $V_{DD} = 160 \text{ V}, I_D = 7 \text{ A}$	$Q_{gs}$	-	5	7.5	nC
Gate to drain charge $V_{DD} = 160 \text{ V}, I_D = 7 \text{ A}$	$Q_{gd}$	-	10	22.5	
Gate charge total $V_{DD} = 160 \text{ V}, I_D = 7 \text{ A}, V_{GS} = 0 \text{ to } 10 \text{ V}$	$Q_g$	-	21	31.5	
Gate plateau voltage $V_{DD} = 160 \text{ V}, I_D = 7 \text{ A}$	$V_{(\text{plateau})}$	-	7	-	V

### Reverse Diode

Inverse diode continuous forward current $T_C = 25^\circ\text{C}$	$I_S$	-	-	7	A
Inverse diode direct current,pulsed $T_C = 25^\circ\text{C}$	$I_{SM}$	-	-	28	
Inverse diode forward voltage $V_{GS} = 0 \text{ V}, I_F = 14 \text{ A}$	$V_{SD}$	-	1.3	1.7	V
Reverse recovery time $V_R = 100 \text{ V}, I_F=I_S, di_F/dt = 100 \text{ A}/\mu\text{s}$	$t_{rr}$	-	200	300	ns
Reverse recovery charge $V_R = 100 \text{ V}, I_F=I_S, di_F/dt = 100 \text{ A}/\mu\text{s}$	$Q_{rr}$	-	0.6	0.9	$\mu\text{C}$

### Power Dissipation


$$P_{\text{tot}} = f(T_C)$$

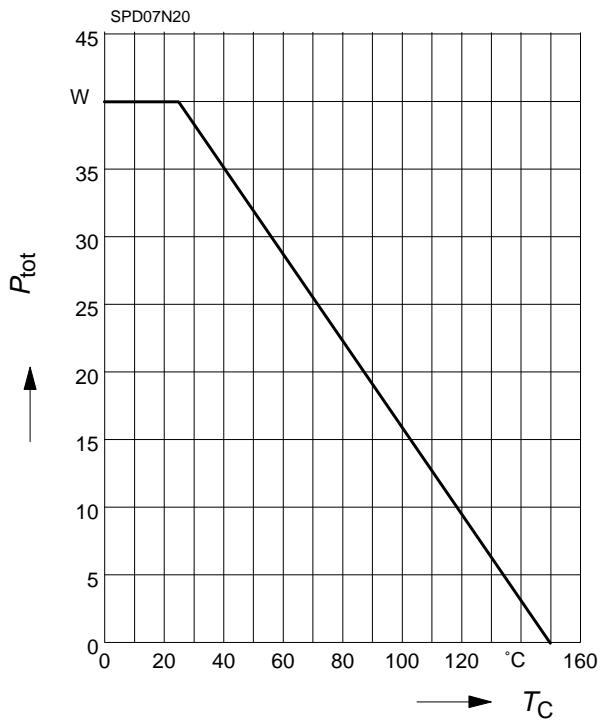

### Drain current

$$I_D = f(T_C)$$


parameter:  $V_{GS} \geq 10$  V

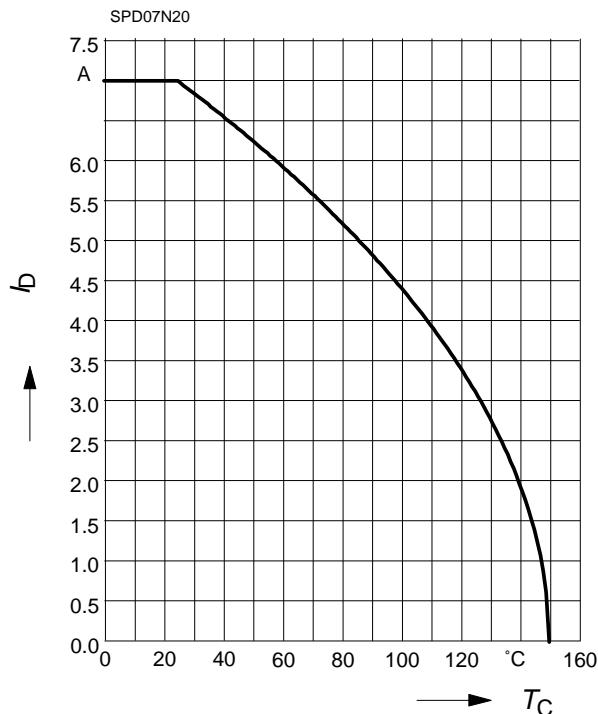

### Safe operating area

$$I_D = f(V_{DS})$$


parameter :  $D = 0$  ,  $T_C = 25$  °C

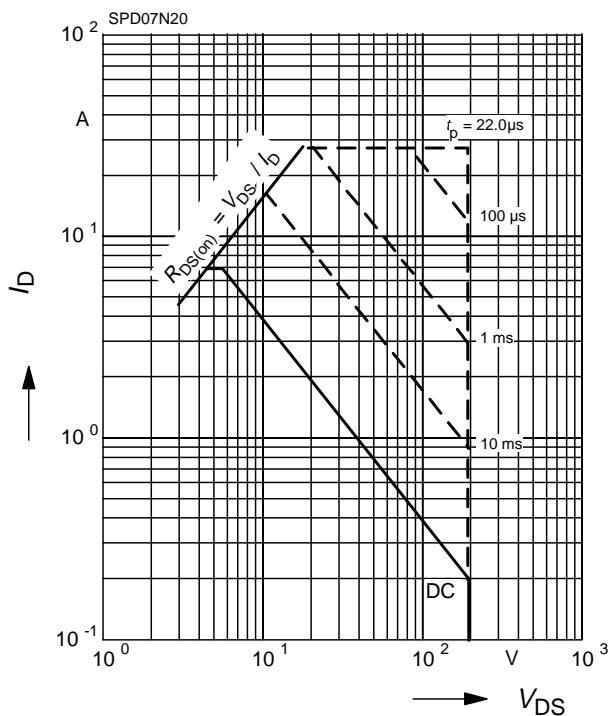

### Transient thermal impedance

$$Z_{\text{thJC}} = f(t_p)$$


parameter :  $D = t_p/T$

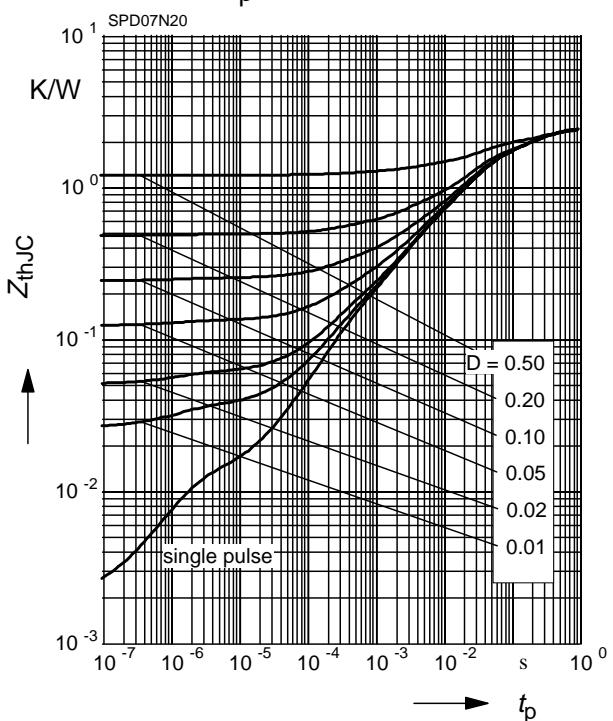

### Typ. output characteristics

$$I_D = f(V_{DS})$$


parameter:  $t_p = 80 \mu s$

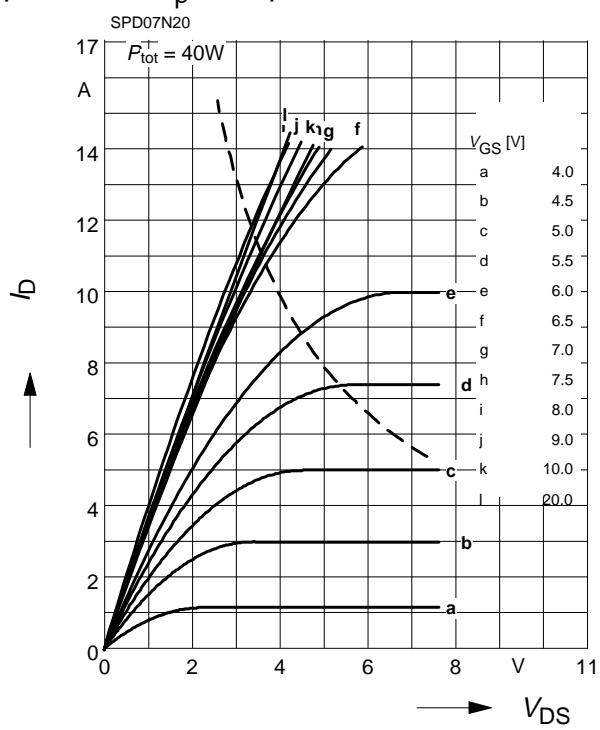

### Typ. drain-source-on-resistance

$$R_{DS(on)} = f(I_D)$$


parameter:  $V_{GS}$

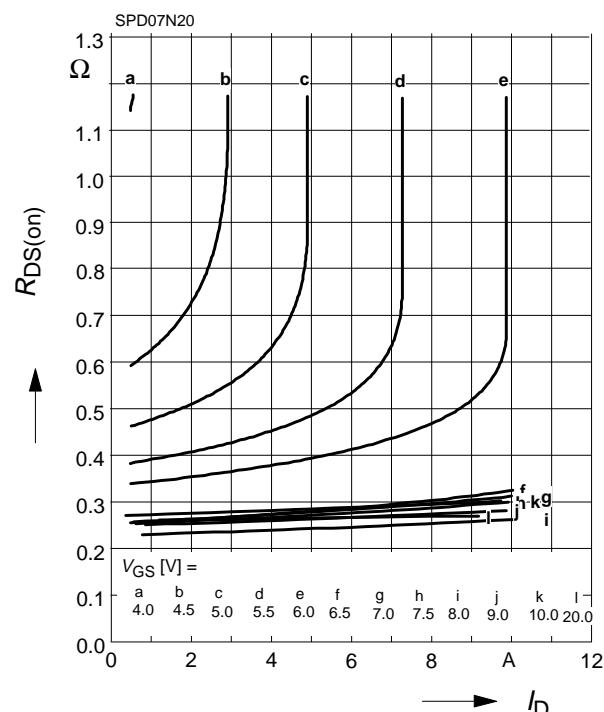

### Typ. transfer characteristics $I_D = f(V_{GS})$

parameter:  $t_p = 80 \mu s$


$V_{DS} \geq 2 \times I_D \times R_{DS(on)} \text{ max}$

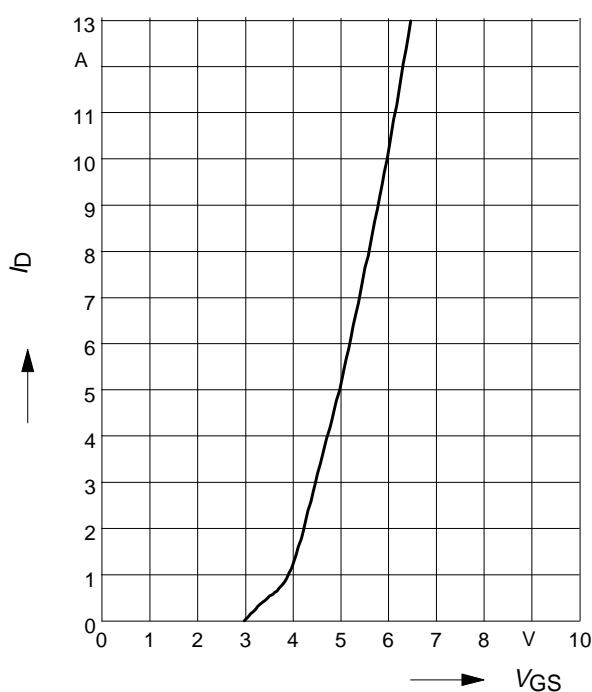

### Typ. forward transconductance

$$g_{fs} = f(I_D); T_j = 25^\circ C$$


parameter:  $g_{fs}$

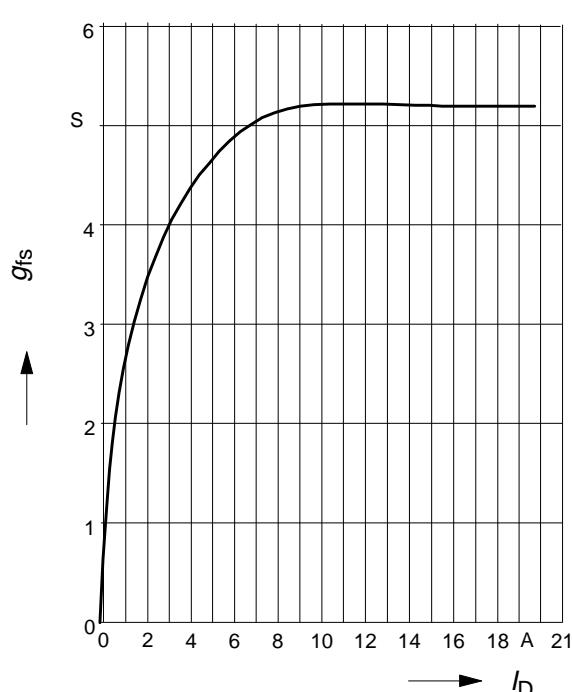

### Drain-source on-resistance

$$R_{DS(on)} = f(T_j)$$


parameter :  $I_D = 4.5 \text{ A}$ ,  $V_{GS} = 10 \text{ V}$

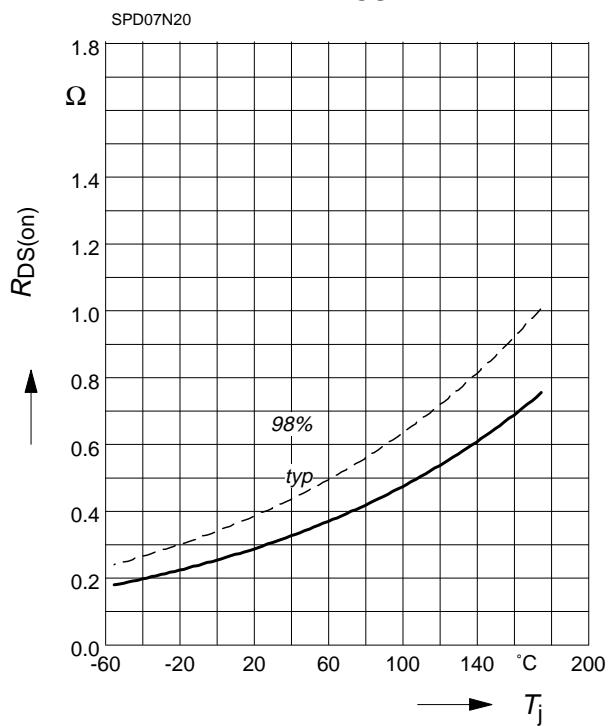

### Typ. capacitances

$$C = f(V_{DS})$$


parameter:  $V_{GS} = 0 \text{ V}$ ,  $f = 1 \text{ MHz}$

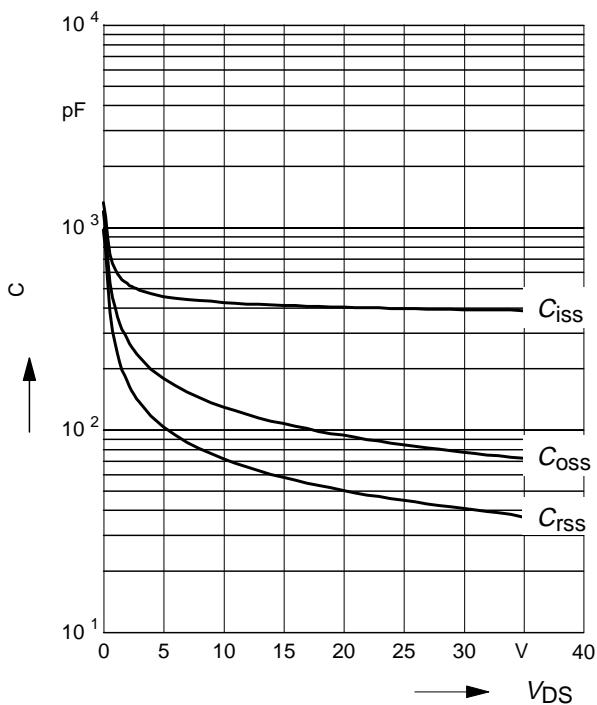

### Gate threshold voltage

$$V_{GS(th)} = f(T_j)$$


parameter :  $V_{GS} = V_{DS}$ ,  $I_D = 1 \text{ mA}$

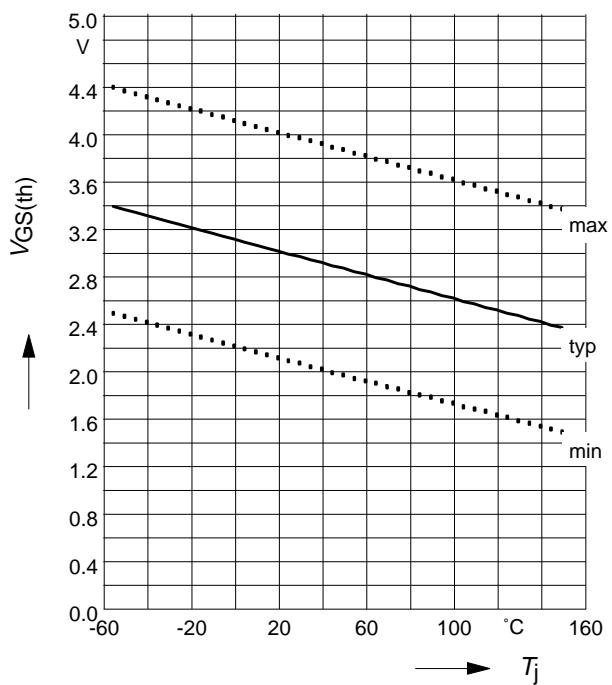

### Forward characteristics of reverse diode

$$I_F = f(V_{SD})$$


parameter:  $T_j$ ,  $t_p = 80 \mu\text{s}$

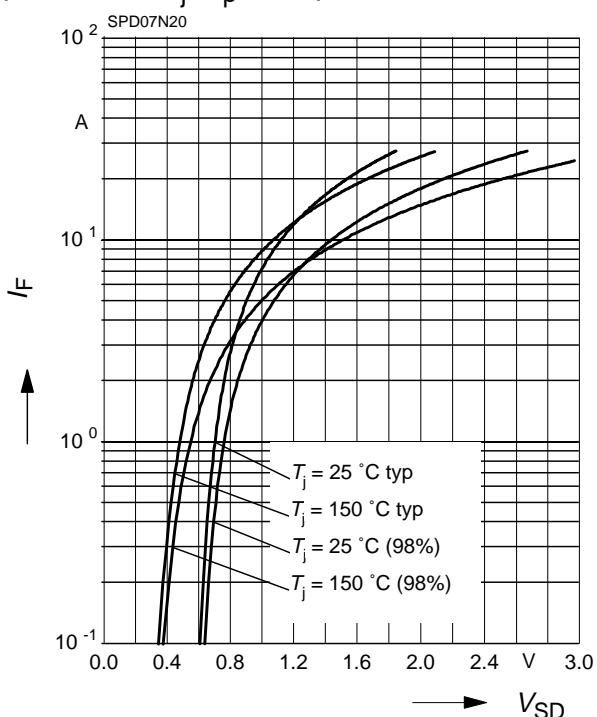

**Avalanche Energy**  $E_{AS} = f(T_j)$

parameter:  $I_D = 7 \text{ A}$ ,  $V_{DD} = 50 \text{ V}$


$R_{GS} = 25 \Omega$

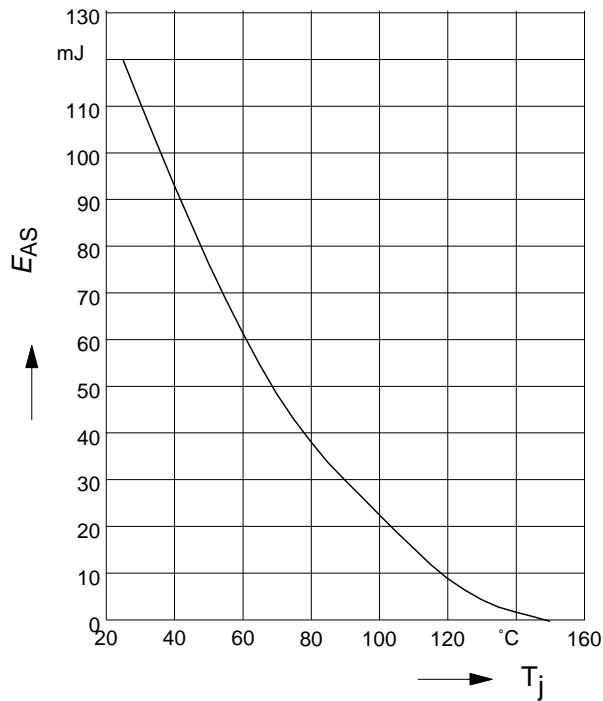

**Typ. gate charge**

$V_{GS} = f(Q_{Gate})$

parameter:  $I_D \text{ puls} = 7 \text{ A}$

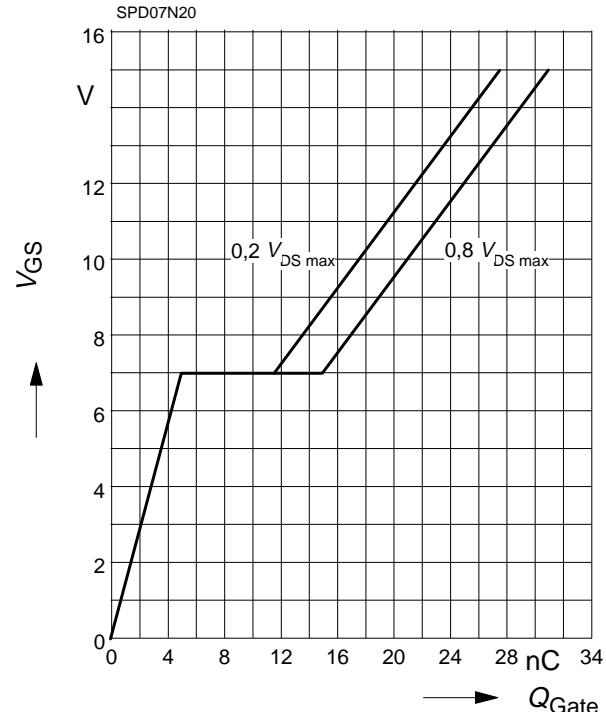

**Drain-source breakdown voltage**

$V_{(BR)DSS} = f(T_j)$

