



# **FEATURES**

- Less Space (7/8" Dia. Sizes)
- Reliability
- Resolution
- Output Smoothness
- > Special Linearity Options
- > Mechanical Stops Option
- Long Life
- Various Non-Linear Tapers, Taps, Multi-sections, Electrical Angles, Special Total Resistance

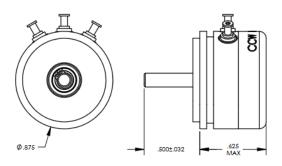

SCHEMATIC DIAGRAM

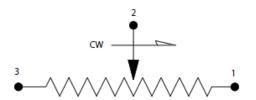

# **6009 ROTARY SERIES**

1KΩ, 2KΩ, 5KΩ,10KΩ, 20KΩ, • Precision Position Potentiometer 7/8" Dia. Servo Mount

# **SPECIFICATIONS**

Industrial / Military Grade Rotary Position Sensor

Rotational Operating Life 100 x 10<sup>6</sup> Revolutions Min.

**Anodized Aluminum Housing** 

Stainless Steel Shaft & Ball Bearings

General Requirements IAW MIL-PRF-39023

MEAS rotary potentiometer designs provide various non-linear tapers, taps, multi-sections, and electrical angles while maintaining great reliability.

# **ELECTRICAL CHARACTERISTICS**

**RESISTANCE**  $1K\Omega$  to  $20K\Omega \pm 10\%$ 

ACTIVE ELECTRICAL ANGLE 340°

**ELECTRICAL CONTINUITY ANGLE** 344° MIN

INDEPENDENT LINEARITY ±0.5%
END VOLTAGE 0.5% MAX

VOLTAGE RESOLUTION VIRTUALLY INFINITE

OUTPUT SMOOTHNESS 0.1% MAX

**RESISTANCE TEMP. COEFFICIENT** 400PPM/°C MAX

POWER RATING @ 70°C 1.0 WATT MAX

WIPER CONTACT CURRENT 10mA MAX

**DIELECTRIC STRENGTH** 750 VRMS @ 60Hz

INSULATION RESISTANCE 100mΩ MIN @ 500VDC

# MECHANICAL CHARACTERISTICS

MECHANICAL ROTATION CONTINUOUS STARTING TORQUE 0.25 Oz.-In. MAX **RUNNING TORQUE** 0.20 Oz.-In. MAX **TOTAL WEIGHT (1-GANG)** 0.6 Oz. MAX **PILOT RUNOUT** 0.001 In. TIR **SHAFT RUNOUT** 0.001 In. TIR **SHAFT ENDPLAY** 0.003 MAX **SHAFT RADIAL PLAY** 0.001 In. TIR LATERAL RUNOUT 0.002 In. TIR

#### STANDARD MATERIALS

HOUSING AND COVER ANODIZED ALUMINUM

SHAFT & BALL BEARINGS STAINLESS STEEL

RESISTANCE ELEMENT CO-MOLDED CONDUCTIVE PLASTIC


ELECTRICAL CONTACTS MULTI-FINGER PRECIOUS METAL

**SOLDER TERMINALS** GOLD PLATED BRASS

#### **ENVIRONMENTAL CHARACTERISTICS**

**OPERATING TEMP. RANGE** -65°C to +125°C

**ROTATIONAL OPERATING LIFE** 100 x 10<sup>6</sup> REVOLUTIONS MIN.

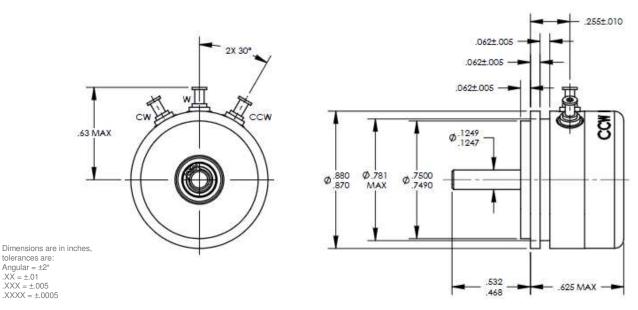

# **AVAILABLE OPTIONS / CUSTOMIZATION**

- Resistance Values
  - $\circ$  500 $\Omega$  to 50K $\Omega$
- Tolerances
  - o As low as ±5%
- Special Linearity
  - As low as ±.15%
  - Absolute (Indexed)
  - Or Independent over specified regions
- Additional Taps, Current or Voltage
- Current Limit Resistors
- Internal Circuit Components
  - o Caps, Diodes, etc.
- Special Electrical Angles
  - o Up to 355° MAX
- Wire Leads or Cable in place of Terminals
- Special Transfer Functions
  - Non-Linear Outputs
  - Load Compensation
  - o Trig, Log, & Exponential Outputs

- Multi-gang Construction
  - Up to 6 on a common shaft (+ .320 Length per gang) or concentric shafting
- Shaft Modifications
  - o Rear Extensions
  - Flats
  - Slots
  - o Steps
- Mounting Features
  - Anti-rotation Pins
  - o Bolt Flanges
  - Threaded Holes
- Rotational Stops
- Ancillary Devices
  - Clutches
  - o Brakes
  - Switches
- ◆ Environmental Capabilities
  - Moisture Seals
  - o High Shock & Vibe

#### ORDERING INFORMATION

| Model Number: | Resistance: |
|---------------|-------------|
| 6009-1000-030 | 1KΩ ±10%    |
| 6009-1001-030 | 2KΩ ±10%    |
| 6009-1002-030 | 5KΩ ±10%    |
| 6009-1003-030 | 10KΩ ±10%   |
| 6009-1004-030 | 20KΩ ±10%   |

#### **NORTH AMERICA**

Measurement Specialties, Inc., a TE Connectivity Company Phone +1-800-522-6752 Email: customercare.grsv@te.com

# TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Accustar, American Sensor Technologies, AST, ATEXIS, DEUTSCH, IdentiCal, TruBlue, KPSI, Krystal Bond, Microfused, UltraStable, Measurement Specialties, MEAS, Schaevitz, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.